

CIERRE MECÁNICO TIPO: CM14/CM142/CM143/CM14S20

Datos Técnicos:

No equilibrado.

Independiente del sentido de


Fuelle elastomérico.

Cumple con DIN24960, ISO

Temperatura: -30°C a 220°C

Presión: 12 BAR

Velocidad: 10 m/seg

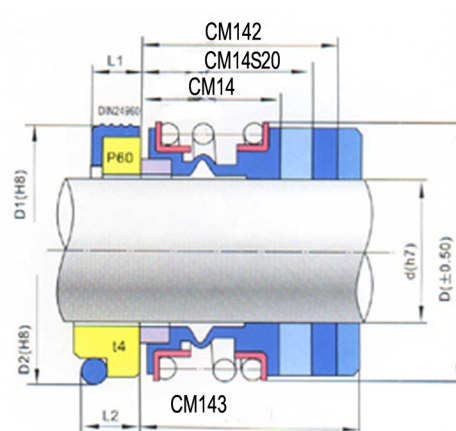

d	D	D1	D2	D3	L1	L2	L3	L4	CM14	CM142	CM143	CM14S20
10	22	21	19.2	24.6	6.5	6.5	9	10	14.7	25.2	26	33.5
12	24.5	23	21.6	27.8	6.5	5.5	9	10	15.2	25.2	26	33.5
14	28	25	24.6	30.95	6.5	5.5	10.5	10	17.2	25.2	28.5	33.5
15	28	27	24.6	30.95	6.5	6.5	10.5	10	17.2	25.2	28.5	33.5
16	28	27	28	30.95	6.5	7.5	10.5	10	17.2	25.2	28.5	33.5
18	31.5	33	30	34.15	7.5	8	10.5	11.4	19.7	25.2	30.1	37.7
19	36.5	35	35	34.15	7.5	7.5	10.5	11.4	21.7	25.2	30.1	37.7
20	36.5	35	35	35.7	7.5	7.5	10.5	11.4	21.7	25.2	30.1	37.7
22	36.5	37	35	37.3	7.5	7.5	10.5	11.4	21.7	25.2	30.1	37.7
24	42	39	38	40.5	7.5	7.5	10.5	11.4	22.7	25.2	32.7	42.7
25	42	40	38	40.5	7.5	7.5	10.5	11.4	23.2	25.2	32.7	42.7
28	48.5	43	42	46.65	7.5	9	12	11.4	26.7	33.5	35.2	42.7
30	48.5	45	45	50.8	7.5	10.5	12	11.4	26.7	33.5	35.2	42.7
32	53	48	48	50.8	7.5	10.5	12	11.4	27.7	33.5	35.2	47.7
33	53	48	50	54	7.5	11	12	11.4	27.7	33.5	35.2	47.7
35	56.5	50	52	54	7.5	11	12	11.4	28.7	33.5	35.2	47.7
38	58.5	56	55	57.15	9	10.5	12	14	30.2	33.5	36.2	46.2
40	61.5	58	58	60.35	9	10.8	12	14	30.2	33.5	36.2	46.2
42	65	61	62	63.5	9	12	12	14	30.2	41.5	36.2	51.2
43	65	61	62	63.5	9	12	12	14	30.2	41.5	36.2	51.2
45	67.5	63	64	63.5	9	11.5	12	14	30.2	41.5	36.2	51.2
48	70	66	68.4	66.7	9	11.5	12	14	30.7	41.5	36.2	51.2
50	73.5	70	69.3	69.85	9.5	11.5	13.5	15	30.7	41.5	38.2	50.7
53	78	73	72.3	73.05	11	12.5	13.5	15	33.2	41.5	36.7	59.2
55	80.5	75	75.4	76.2	11	13.5	13.5	15	35.2	41.5	36.7	59.2
58	85	78	78.4	79.4	11	13.5	13.5	15	37.2	41.5	41.7	59.2
60	88	80	80.4	79.4	11	13.5	13.5	15	38.2	41.5	41.7	59.2
65	93	85	85.4	92.1	11	13	16	15	40.2	49.5	41.7	69.2
68	96	90	91.5	95.25	11.5	13.7	16	18	40.2	49.5	41.3	69
70	99	92	92	95.25	11.5	13	16	18	40.2	49.5	49	69
75	106.5	97	99	101.6	11.5	14	16	18	40.2	52.5	49	69
80	111.5	105	104	114.3	12	15	20	18.3	40.2	56.5	48.2	78.2
85	119.5	110	109	117.5	14	15	20	18.3	41.2	56.5	46.2	76.2
90	126.5	115	114	123.85	14	15	20	18.3	45.2	59.5	51.2	76.2
95	131.5	120	120.3	127	14	16	20	17.3	46.2	59.5	51.2	76.2
100	136.50	125	123.3	133.35	14	16	20	17.3	47.2	62.5	51.2	76.2

