


# CIERRE MECÁNICO TIPO: CM250

Datos Técnicos:

Temperatura: -20°C a 150°C

Presión: 10 BAR

Velocidad: 16 m/seg

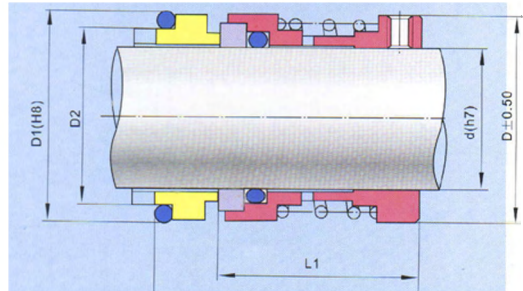

TIPO	∅	d	D	D1	D2	L	L1
CM250-20		20	34	35	29	54.5	41.5
CM250-22		22	36	37	31	54.5	41.5
CM250-24		24	38	39	33	56.5	43.5
CM250-25		25	39	40	34	56.5	43.5
CM250-28		28	42	43	37	58.5	45.5
CM250-30		30	44	45	39	58.5	45.5
CM250-33		33	47	48	42	58.5	45.5
CM250-35		35	49	50	44	62.5	49.5
CM250-38		38	54	56	50	66.5	53.5
CM250-40		40	56	58	52	68.5	55.5
CM250-43		43	59	61	55	68.5	55.5
CM250-45		45	61	63	57	68.5	55.5
CM250-48		48	64	66	60	68.5	55.5
CM250-50		50	66	68	62	73.5	60.5
CM250-53		53	69	71	65	74.5	61.5
CM250-55		55	71	73	67	74.5	61.5
CM250-58		58	76	79	70	79.5	63.5
CM250-60		60	78	81	72	79.5	63.5
CM250-63		63	81	84	75	79.5	63.5
CM250-65		65	83	86	77	83.5	67.5
CM250-70		70	90	92	83	84.5	68.5
CM250-75		75	95	97	88	88.5	72.5
CM250-80		80	100	105	96	88.5	72.5
CM250-85		85	105	110	101	93.5	77.5