


# CIERRE MECÁNICO TIPO: CM8T Y CM9T

Datos Técnicos:

Temperatura: -40°C a 200°C

Presión: 15 BAR

Velocidad: 20 m/seg

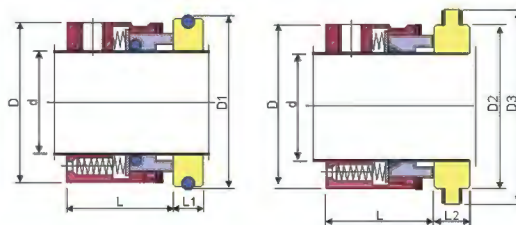

CM8T

CM9T

d	D	D1	D2	D3	L	L1	L2
0.750	1.190	1.375	1.312	1.718	0.937	0.406	0.812
0.875	1.315	1.500	1.437	1.843	0.937	0.406	0.812
1.000	1.440	1.625	1.562	1.968	1.000	0.437	0.812
1.125	1.565	1.750	1.687	2.093	1.000	0.437	0.812
1.250	1.690	1.875	1.812	2.218	1.000	0.437	0.812
1.375	1.940	2.000	2.062	2.593	1.375	0.437	0.875
1.500	1.940	2.125	2.062	2.593	1.125	0.437	0.875
1.625	2.250	2.375	2.375	2.906	1.156	0.500	0.875
1.750	2.315	2.500	2.437	2.968	1.375	0.500	0.875
1.875	2.500	2.625	2.625	3.156	1.375	0.500	0.875
2.000	2.625	2.750	2.750	3.406	1.375	0.500	1.000
2.125	2.812	3.000	2.937	3.593	1.687	0.562	1.000
2.250	2.843	3.125	2.968	3.625	1.375	0.562	1.000
2.375	3.000	3.250	3.125	3.781	1.687	0.562	1.000
2.500	3.125	3.375	3.250	3.906	1.375	0.562	1.000
2.625	3.250	3.375	3.375	4.031	1.687	0.625	1.000
2.750	3.375	3.500	3.500	4.156	1.687	0.625	1.000
2.875	3.500	3.750	3.625	4.281	1.687	0.625	1.000
3.000	3.625	3.875	3.750	4.406	1.687	0.625	1.000
3.125	3.750	4.000	3.875	4.531	1.687	0.781	1.000
3.250	3.875	4.125	4.000	4.656	1.687	0.781	1.000
3.375	4.000	4.250	4.125	4.781	1.687	0.781	1.000
3.500	4.125	4.375	4.250	4.906	1.687	0.781	1.000
3.625	4.250	4.500	4.375	5.031	1.687	0.781	1.000
3.750	4.375	4.625	4.500	5.156	1.687	0.781	1.000
3.875	4.500	4.750	4.625	5.281	1.687	0.781	1.000
4.000	4.625	4.875	4.750	5.406	1.687	0.781	1.000