



CIERRE MECÁNICO TIPO: CM20D

Datos Técnicos:
 Cierre Doble.
 Temperatura: 0°C a 100°C
 Presión: 10 BAR
 Velocidad: 10 m/seg

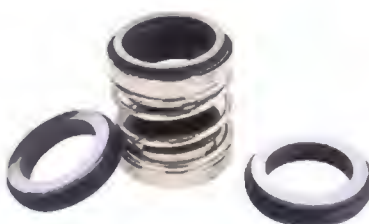


TIPO	Ø	d	D1	L	L1
CM4702-20		20	35	46.8	8
CM4702-25		25	40	52.3	8
CM4702-28		28	43	52.3	8
CM4702-30		30	45	54.3	9
CM4702-32		32	48	64.3	9
CM4702-35		35	50	64.3	9
CM4702-40		40	58	64.3	9
CM4702-45		45	63	71.3	9.5
CM4702-50		50	70	71.3	9.5
CM4702-55		55	75	75.3	9.5
CM4702-60		60	80	77.3	9.5

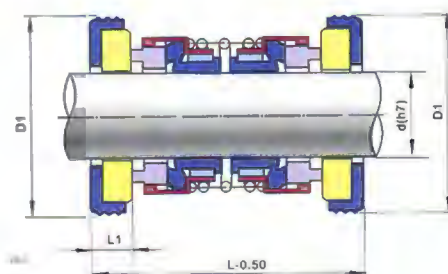

CIERRE MECÁNICO TIPO: CM20DP

Datos Técnicos:
 Temperatura: -20°C a 110°C
 Presión: 10 BAR
 Velocidad: 6 m/seg

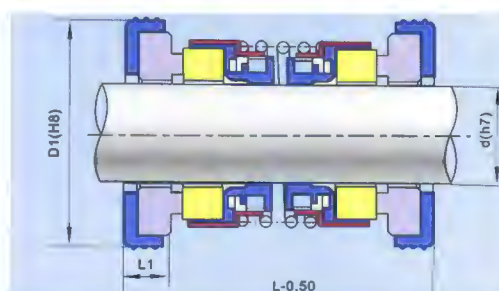

TIPO	Ø	d	D1	L	L1
CM202-14		14	26/28/30	38.3	7
CM202-15		15	28/30	38.3	7
CM202-16		16	28/30	38.3	7
CM202-18		18	34	38.3	7
CM202-20		20	36	40.3	7
CM202-25		25	41	51.3	9