

CIERRE MECÁNICO TIPO: CM104 Y CM110

Datos Técnicos:

Temperatura: -202°C a 200°C

Presión:

- MODELO CM104: 15 BAR

- MODELO CM110: 20 BAR


Velocidad: 15 m/seg




CM104

TIPO	Ø	d1	D	D1	D2	L1	L2	L3
CM104-16	16	33	33	25	53	8	37	
CM104-18	18	35	36	28	56	11	40	
CM104-20	20	37	40	30	59	11	40	
CM104-22	22	39	42	32	62	14	43	
CM104-25	25	42	45	35	62	14	43	
CM104-28	28	45	48	38	63	15	44	
CM104-30	30	52	50	40	68	15	49	
CM104-35	35	57	55	45	70	17	51	
CM104-40	40	62	60	50	73	20	54	
CM104-45	45	67	65	55	79	25	60	
CM104-50	50	72	70	60	82	28	63	
CM104-55	55	77	75	65	84	30	65	
CM104-60	60	82	80	70	84	30	65	
CM104-65	65	92	90	80	96	35	74	
CM104-70	70	97	97	85	101	37	76	
CM104-75	75	102	102	90	101	37	76	
CM104-80	80	107	107	95	106	42	81	
CM104-85	85	112	112	100	107	42	82	
CM104-90	90	117	117	105	108	43	83	
CM104-95	95	122	122	110	108	43	83	
CM104-100	100	127	127	115	108	43	83	
CM104-110	110	141	142	130	132	60	105	
CM104-120	120	151	152	140	132	60	105	

CM110

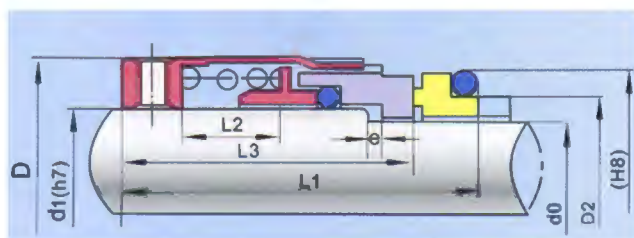

CM104

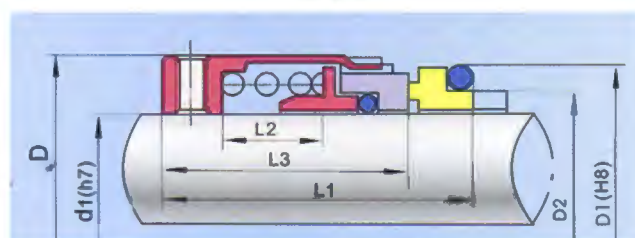

CM110

TIPO	Ø	d1	d0	D	D1	L1	L2	L3	e	D2
CM110-16	16	11	33	33	61	8	45	2	25	
CM110-18	18	13	35	36	64	11	48	2	28	
CM110-20	20	5	37	40	67	11	48	2	30	
CM110-22	22	17	39	42	70	14	51	2	32	
CM110-25	25	20	42	45	70	14	51	2	35	
CM110-28	28	22	45	48	71	15	52	2	38	
CM110-30	30	25	52	50	77	15	58	3	40	
CM110-35	35	28	57	55	80	17	61	3	45	
CM110-40	40	34	62	60	83	20	64	3	50	
CM110-45	45	38	67	65	89	25	70	3	55	
CM110-50	50	44	72	70	92	28	73	3	60	
CM110-55	55	48	77	75	94	30	75	3	65	
CM110-60	60	52	82	80	94	30	75	3	70	
CM110-65	65	58	92	90	103	35	81	3	80	
CM110-70	70	62	97	97	111	37	86	3	85	
CM110-75	75	66	102	102	111	37	86	3	90	
CM110-80	80	72	107	107	116	42	91	3	95	
CM110-85	85	76	112	112	117	42	92	3	100	
CM110-90	90	82	117	117	118	43	93	3	105	
CM110-95	95	85	122	122	118	43	93	3	110	
CM110-100	100	90	127	127	118	43	93	3	115	
CM110-110	110	100	141	142	144	60	117	3	130	
CM110-120	120	110	151	152	144	80	117	3	140	